

Engineered for Longer Construction Cycles.

DELTA®-STRATUS SA

Vapor Permeable, Self-adhering Water-resistant Barrier & Air Barrier with High UV Resistance.

- UV/weather exposure up to 180 days.
- Aggressively self-adhesive, is air-tight and water-tight.
- Very efficient drainage plane.
- Specifically engineered for longer construction cycles.
- Simple application with fewer accessories.
- Primerless application.
- Split release liner aids installation.
- Improves energy efficiency.
- Matte gray color reduces irritating glare during installation.
- Meets building codes requirements.
- ICC ESR-2932

Vapor permeance:

50 perms (Method B [grains/h/ft²/in Hg] ASTM E96-05)

Roll length:


115' (35 m)

Roll width:

4' 11" (1.5 m)

19.5" (50 cm)

9.75" (25 cm)

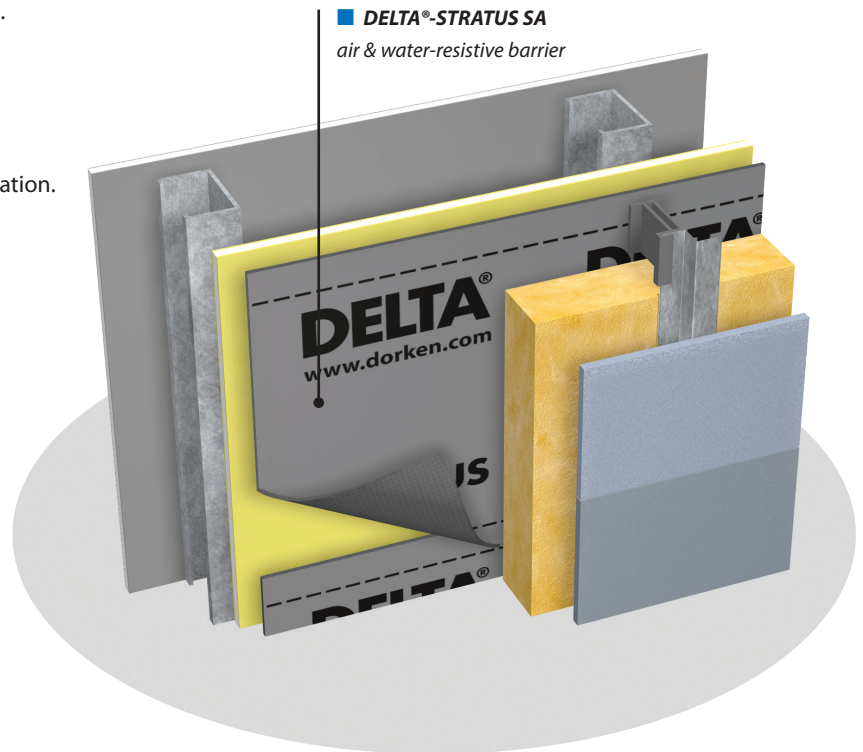

Available at:

DELTA® is a registered trademark of Ewald Dörken AG, Herdecke, Germany. 06/30/21v1